




Advanced Networking, Inc.

Telephone 302-792-9200 Facsimile 302-792-9294

www.advnetwork.com

Basic Instructions for Your Grandstream GXP2160 IP Phone

Visual Overview of the Phone

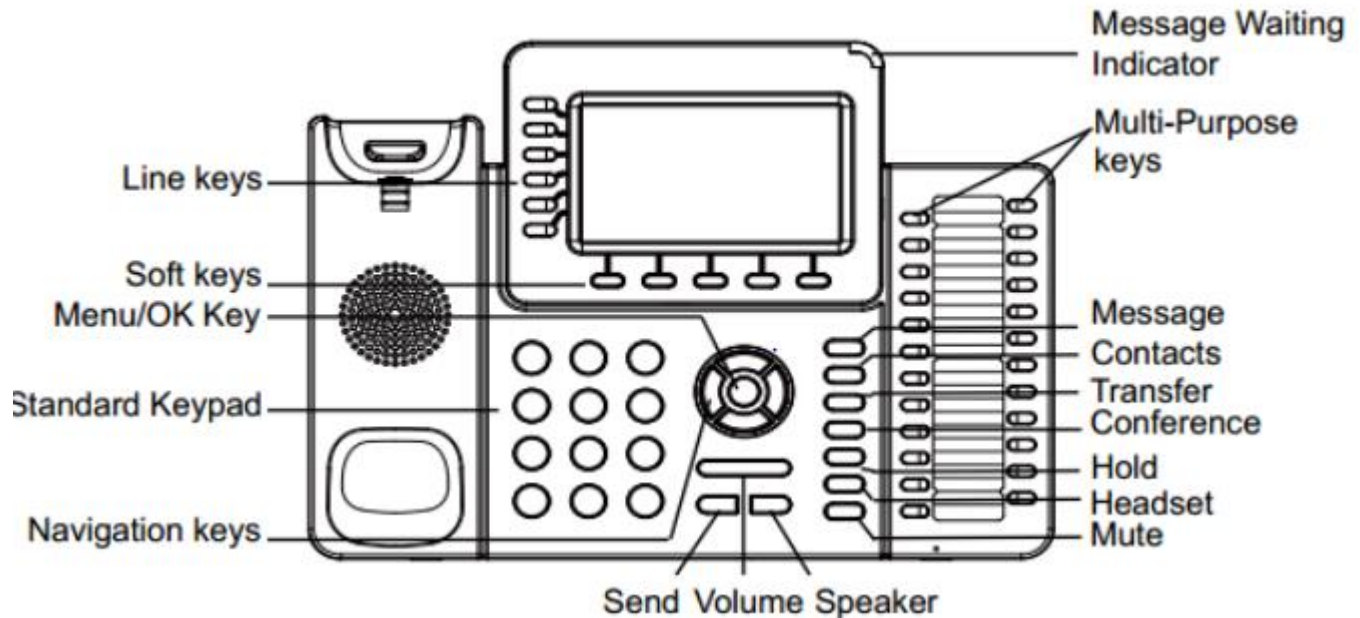


Making a call

1. Do not pick up the phone first! This makes using the backspace function on the next step possible.
2. Dial the **number** using the keypad, using the 1 and area code if needed. You do not have to dial 9 first. The system knows the difference between extensions and valid phone numbers. You may use the **BackSpace** soft key if you make a mistake while dialing.
3. Either press the **speaker** button or lift up the **handset**.
4. *You may alternatively pick up the handset or press speaker before you dial. If you do this, the phone will dial the requested number immediately upon pressing the **Dial** soft-key or it will time out and dial after four seconds. For this reason, it is recommended to dial the number before picking up or pressing the speaker key on the phone.*

To "Page" an extension

For intercom paging, press ** and then enter the **extension** or **group number** of the party or group you want to page. This feature will call an extension or group of extensions, allowing you to speak immediately over the speaker in the telephone without ringing the phone itself.

Placing a call on hold

1. While on the call, press the **Hold**  key. This will place the call on hold on one of the **Line** keys.
2. If you need to place another call after you put the call on hold, you will have to hit the **Line 2** key to get another line. Dial as needed and press the **Dial** soft key to send the digits. .

Member: DE State Chamber of Commerce

-- 2017 Our 31st Year --

Telephone and Voice Mail Systems • Fax to Email Forwarding • Network Wiring
Dial Tone, Long Distance, & Internet Services • Voice Mail Rental Boxes

1316 Philadelphia Pike

Wilmington, DE 19809

Placing a call on hold to answer an incoming call

1. When you're on the first call, the second **Line** key will blink Red. To answer the second call, press the blinking red **Line** key.
2. This will automatically put the first call on hold.
3. To switch between the lines, just press the appropriate **Line** Key. (There is no need to put the calls on hold as this is done automatically).
4. To drop one of the calls, be on that line and press the **End Call** soft key or hang up.

Picking up a call on hold

1. Press the **Line** button that is blinking where the call is on hold.
2. Or Press the **Pickup** soft key to pick up the last call you placed on hold.

Parking calls

It is best to use the Park orbits when placing a call on hold for someone else.

1. While on the call, press an available **Park** key.
2. The status of park orbits are usually displayed on every phone.
3. To retrieve the parked call, press the blinking Park Orbit button.


Picking up a Call that is Ringing on another phone

1. Dial the digits **99 + the extension number of the ringing phone**
2. Pick up the handset or press the speaker button. You have now picked up that call.


NOTE: If you dial 99 and pick up the phone, you will answer ANY phone ringing in your pick-up group. If you need a specific group of phones to use this with, please call our office or let your system admin know.

Transferring a call


Supervised Transfer

1. While on the call, press the **Transfer** key. 
2. Enter the **extension** number or outside number.
3. Press the **# (pound)** key.
4. Wait for the person to answer and **announce** the call.
5. If they want it, press the **Transfer** key again and **hang up**.
6. If the person does not want the call or does not answer, press the **Split** soft key.
7. Press the **End** soft key to end the call.
8. Press **the blinking Line** key which still has the original caller on hold to get the caller back.


Supervised Transfer Using a Programmable Key as the Destination

1. While on the call, press the **Transfer** key. 
2. Press the **programmable DSS/BLF button** of the person to whom you wish to transfer the call.
3. Announce the call.
4. If they want it, press the **Transfer** key again and **hang up**.
5. If the person does not want the call or does not answer, press the **Split** soft key.
6. Press the **End** soft key to end the call.
7. Press **the blinking Line** key which still has the original caller on hold to get the caller back.


Unsupervised Transfer

1. While on the call, press the **Transfer** key. 
2. Enter the **extension** number, press the **Transfer** key again and then **hang up**.
3. The user still has the option to take or reject the call once it is transferred to them.

Transferring a call directly to voicemail

1. While on the call, press the **Transfer** key. 
2. Press * and the **extension** number.
3. Press the **Transfer** key again and the call is directly routed to the user's voicemail.

Conference calls

1. Make the first call as usual.
2. Press the **Conference** key. 
3. Dial the **second number**.
4. Wait for the second party to answer.
5. To bring all three parties together, hit the **Conf** key again.
6. If you make a mistake while dialing or the second party is not there, press the **Cancel** soft key and press the blinking Line key to return to the previous caller.
You can only add up to 3 parties including yourself to the Conference Call. If you need to add more, you can use the Meet-Me-Conferencing Feature.

Using the speakerphone

1. Dial the number and then press the Speakerphone/Headset button.
2. To hang up, press the Speaker button.
3. You may also pick up the handset to take the phone out of speakerphone mode.

Volume controls


The volume keys change the volume of the ringer, the handset, and the speakerphone. To change the volume of the ringer, press up or down when the phone is not off-hook.

Voicemail System


Setting Up Your Voicemail

The first time you access your mailbox, the system will walk you through setting up your password, name recordings, and greetings. Please follow this all the way through and it will not play the tutorial again. The following instructions are for when you need to change something after the initial setup.

Recording greetings


1. Press the **Message** key. 
2. Enter your password. In default, this your extension number, followed by the # key.
3. Press **0** for Mailbox Options.
4. You have the option of recording up to three greetings. At the very least, record an Unavailable Message. Press **1** to record the Unavailable Message.
5. Record the message after the tone and press pound.
6. To keep the message, press **1** to accept the message. If not satisfied, press **3** to re-record and repeat steps 5 and 6.

Recording name

1. Press the **Message** key. 
2. Enter your **password**, followed by the # key.
3. Press **0** for Mailbox Options.
4. Press **3** to record your name.
5. Record the name after the tone and press pound.
6. To keep the message, press **1** to accept the message. If not satisfied, press **3** to re-record and repeat steps 5 and 6.


Setting your mailbox password

We strongly recommend you change your voicemail password as soon as possible. By default, it is your extension number. Anyone who knows this can access your mailbox through the web and listen to and delete your messages, see your call logs, and modify settings on your extension.

1. Press the **Message** key. 
2. Enter your **password**, followed by the # key.
3. Press **0** for Mailbox Options.
4. Press **5** to change your password.
5. Please enter your new **password**, followed by the **pound** key.
6. Re-enter your **password** followed by the **pound** key for confirmation.
7. If everything is correct, the system will tell you your password has been changed.


Recording a Temporary Greeting

Use the Temporary Greeting when you want to record a greeting that you plan to use for a limited time (for example an out-of-office greeting).

1. Press the **Message** Key. 
2. Enter your **password**, followed by the # key.
3. Press **0** for Mailbox Options.
4. Press **4** to record your Temporary Greeting
5. After the tone, record your temporary greeting.
6. Press # when finished.
7. Follow the prompts to confirm or record the greeting again.


Deleting Temporary Greeting

When you want to use your original greeting, delete your temporary greeting. To do this:


1. Press the **Message** Key. 
2. Enter your **password**, followed by the # key.
3. Press **0** for Mailbox Options
4. Press **4** to record your Temporary greeting.
5. Press **2** to delete your Temporary Greeting.
6. Hang up

Listening To Messages

New messages

1. Press the **Message** key. 
2. Enter your **password**, followed by the # key.
3. Press **1** to listen to new messages.
4. Follow the prompts to save, delete, etc.

Old messages

1. Press the **Message** key. 
2. Enter your **password**, followed by the # key.
3. Press **2** to change folders.
4. Press **1** for old messages (or listen to the prompts to select another folder).
5. Follow the prompts.

To retrieve messages from another extension (on-site)

1. Dial 924 for the Voicemail Gateway.
2. Enter your extension or mailbox number.
3. Enter your password.

To retrieve messages remotely (Off-Site)

If your system is answered by an auto-attendant or a Voicemail "Backdoor" number:

1. Dial the **main number** or **backdoor number**.
2. Press # for the Voicemail Gateway.
3. You will be prompted to enter your mailbox number, then your password.
4. Follow the prompts to listen to messages.

If you call your own direct-dial number:

1. Dial your direct-dial (private number)
2. Wait for the voicemail to pick up with your personal greeting.
3. Press * (star) for the voicemail gateway.
4. You will be prompted to enter your mailbox number and then your password.
5. Follow the prompts to listen to your messages.

Further on-line help:

Visit our website at <http://www.advnetwork.com/support.html>